


Acrylic colours AERO COLOR® Professional

Replacement tips for six AERO COLOR® Professional LINER!

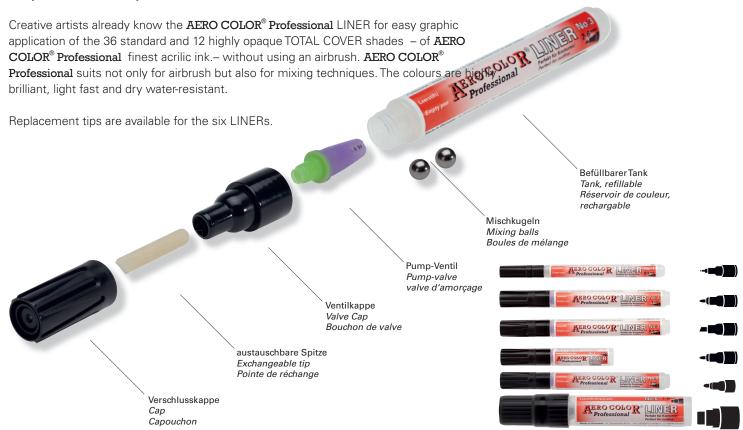

How to change the tips of the AERO COLOR® Professional LINER:

LINER No. 1, No. 3 and No. 5:

- Unscrew LINER cap including valve cap with caution.
- Hold the valve of the LINER and withdraw the tip in forward direction.
- Assemble the new tip.
- Afterwards reassemble the valve cap and the LINER cap and screw it tightly.

LINER No. 2, No. 4 and No. 6:

- Take off the LINER cap.
- Unscrew the valve cap with caution.
- Press the tip incl. the cellular foam out of the valve cap (be careful, both is soaked with colour).
- Reassemble the new tip and the cellular foam, then insert the tip (in forward direction) into the valve cap.
- Afterwards reassemble the valve cap and the LINER cap.

Please note for all kind of LINER:

 Shake well the reassembled and closed LINER and press the tip (gently and with caution) until the colour appears in the tip – done!

Further useful advice:

- When starting, it is advisable to go ahead with caution when exchanging the tips. We recommend you to protect the workplace and to wear protective gloves as AERO COLOR® Professional dries water-resistant!
- Store the tank of the LINER when dismantled upright in a jar in order to avoid that the colour or the 2 mixing balls spill out of the LINER
- Activate the refilled LINER on a separate paper not on your artwork.

Summary of available replacement tips for the Schmincke AERO COLOR® Professional LINER:

LINER	ArtNo.	line width in mm
LINER No. 1	55 090 097	0,8
LINER No. 2 u. No. 4	55 091 097	1,0 ■
LINER No. 3	55 092 097	2,0 - 6,0
LINER No. 5	55 093 097	2,0 ■
LINER No. 6	55 094 097	1,0 – 15,0

Further useful advice and a number of interesting information about AERO COLOR® Professional assortment and about Schmincke are available at www.aerocolor.de and www.schmincke.de.



The described product characteristics and example applications have been tested at the Schmincke laboratory. The information is based on the technical knowledge and experience which are presently available to us. In view of the diversity of applications with regard to painting techniques, materials and working conditions and the numerous possible influencing factors, the information refers to general areas of application. The information provided here does not constitute a legally binding warranty of specific characteristics or of suitability for a specific application; use of the products is thus to be adapted to the user's special conditions and checked by preliminary tests. We are thus unable to guarantee product characteristics or accept any liability for damage arising in connection with the use of our products.

For your information:

For more details regarding health and safety please refer to: www.schmincke.de/ Download/ Safety Data Sheets.

In case of further special technical questions, please contact the Schmincke LAB-Team at laborteam@schmincke.de or by phone +49-211/2509-476.

H. Schmincke & Co. GmbH & Co. KG · Otto-Hahn-Str. 2 · D- 40699 Erkrath · Tel.: +49-211-2509-0 · www.schmincke.de · info@schmincke.de