


NEW: Pouring medium (50546)

- for pouring technique

Pouring technique – the hottest trend in acrylic painting

For this technique acrylic colours can be mixed with a special pouring medium, stacked in different layers in a bin and afterwards be poured onto the painting ground. The colours flow – depending on the mixing ratio with the medium and the composition – more or less uncontrolled into another and form spectacular and bizarre results while drying.

Please note: Adding of silicone can cause cracks.

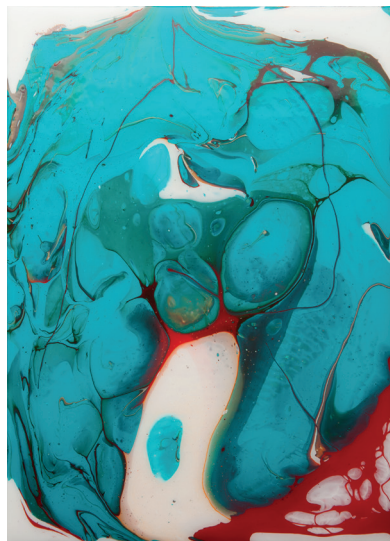

Available in 250 ml, 500 ml, 1 liter and 2 liter

The new Schmincke Pouring medium (50546) is the ideal medium for the pouring technique.

The fluid, glossy, clear medium has good flow properties. It dries to a transparent, non-sticking and water-resistant layer and can also be used as high glossy final lacquer for acrylic paintings. Depending on the mixing ratio it dries to a glossy or semi-mat surface, in pure application to a high glossy surface. After drying of each layer, it can be poured in several layers on nearly all free of grease surfaces. (pre-tests recommended, please protect/ cover your working place).

Pouring medium and acrylic colours

The Pouring medium is mixable with all Schmincke acrylic colours (PRIMAcril[®], AKADEMIE[®] Acryl color, College[®] Acryl, AERO COLOR[®] Professional). The individual mixing ratio with acrylic colours influences the particular results. The medium is ready-to-use, can be applied pure or mixed with acrylic colours. Don't use the product below temperatures under 15 °C object- and room-temperatures. Please clean working tools as soon as possible with water and store in a cool and dry place. Please dispose properly. Do not pour leavings into the drain! Contains: Polyurethane and acrylic dispersion.

The described product attributes and application examples have been tested in the Schmincke laboratory. The information is based on our current state of technical findings and experience. Due to the diversity of applications in terms of painting techniques, materials and working conditions, as well as numerous possible influences, this information is based on a general application range. A legally binding guarantee of specific attributes or the suitability for a specific usage purpose cannot be derived from our information; therefore the use of the products must be adapted to the users' individual conditions and tested in trials. For this reason, we cannot provide

a warranty for product attributes and/or assume liability for damages that occur in connection with the use of our products.

By the way: Specifics for handling and product safety you will find on our website www.schmincke.de (e.g. download/safety data sheets).

For special questions please don't hesitate to ask our team in the lab!

The best way to get in contact with them is via mail at: laborteam@schmincke.de.